



BEAMZ
MADE
EAZY

150.713 V1

LCB244 LED BAR
QUICK START GUIDE

CONTROL MENU

MENU			DESCRIPTION
AUTO	A000-Axxx		Auto-run mode
		SP1-10	Program speed, slow to fast
ADDR	3CH	A001-A510	DMX address setting
	5CH	A001-A508	DMX Channel mode
	8CH	A001-A505	
	24CH	A001-A489	
	48CH	A001-A465	
	53CH	A001-A460	
SHOU	Sh 1-54		Program show
		Sp 1-10	Program speed, slow to fast
		St 0-9	Program flash, slow to fast
SOUO	Sou1		
	Sou2	Sen1-9	Sound mode with sensitivity adjustment
	Sou3		
SLAV	SLAV		Slave mode
COLO	r000-255		Red manual dimming, 0-100%
	g000-255		Green manual dimming, 0-100%
	b000-255		Bleu manual dimming, 0-100%
	St0-St9		Strobe, slow to fast
STAT	CL00-CL26		RGB static colours
SET	Dis	10s	
		20s	
		30s	Setting backlight of the display
		60s	
		on	
	Dir	-->	Setting direction right
		<--	Setting direction left
INFO	Ver	VVxx	Software version

DMX CHANNELS

3 CHANNELS


CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Colours	000-255	LED Red, 0-100%
2		000-255	LED Green, 0-100%
3		000-255	LED Blue, 0-100%

5 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Master dimmer	000-255	Dimmer, 0-100%
2	Strobe	000-009	No function
		010-255	Strobe, slow to fast
3	Colours	000-255	LED Red, 0-100%
4		000-255	LED Green, 0-100%
5		000-255	LED Blue, 0-100%

8 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION		
1	Master dimmer	000-255	Dimmer, 0-100%		
2	Colour	000-255	LED Red, 0-100%		
3		000-255	LED Green, 0-100%		
4		000-255	LED Blue, 0-100%		
5	Mode	000-009	No function (CH2-Ch4 is valid)		
		010-013	Static colour (CH7 selection)		
		014-017	Program show 1		
		018-021	Program show 2		
			
		226-229	Program show 54		
		230-233	Auto Mode (run program show 1-54)		
		234-237	DMX Sound model		
		238-241	DMX Sound mode2		
		242-255	DMX Sound mode3		
		6	Sections Control the colours with CH2, CH3 and CH4 CH7 value 100 will switch off the other Sections	000-009	No function (CH5 is valid)
				010-015	Section 1, LEDs are on
				016-021	Section 2, LEDs are on
				022-027	Section 3, LEDs are on
028-033	Section 4, LEDs are on				
034-039	Section 5, LEDs are on				
040-045	Section 6, LEDs are on				
046-051	Section 7, LEDs are on				
052-057	Section 8, LEDs are on				
058-063	Section 9, LEDs are on				
064-069	Section 10, LEDs are on				
070-075	Section 11, LEDs are on				
076-081	Section 12, LEDs are on				
082-087	Section 13, LEDs are on				
088-093	Section 14, LEDs are on				
094-099	Section 15, LEDs are on				
100-105	Section 16, LEDs are on				
7	Speed			106-111	Pattern effect 1
				112-117	Pattern effect 2
			
		244-255	Pattern effect 24		
7	Static colour (If CH5 value 010-013)	000-255	DMX Program Speed (Slow->fast)		
		000-009	No function		
		010-019	Static colour 1		
		020-029	Static colour 2		
			
8	Strobe	250-255	Static colour 25		
		000-009	No function		
		010-255	Strobe, slow to fast		

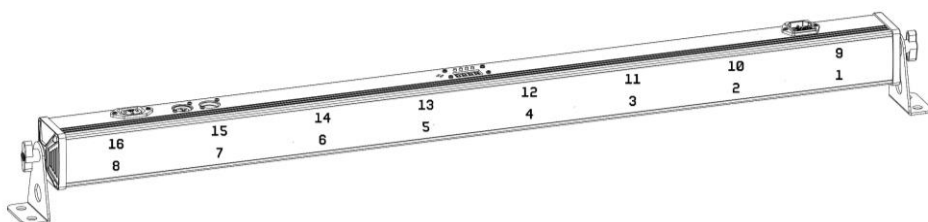



BEAMZ

**YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

